


# n° 05 picnic


## technical sheet

The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited. This technical sheet remains subject to possible changes. All dimensions are in mm, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only.

Version 20111212

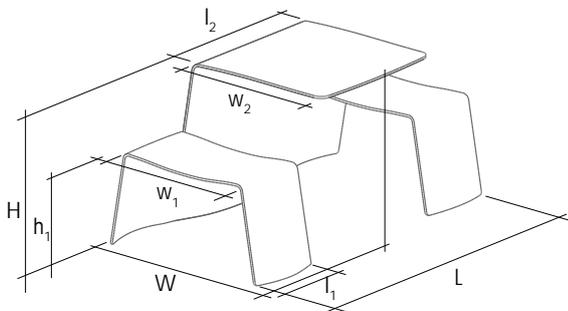

picnik dimensions (mm)	L	W	H	l <sub>1</sub>	l <sub>2</sub>	w <sub>1</sub>	w <sub>2</sub>	h <sub>1</sub>
picnik	1470	950	740	355	700	630	750	450

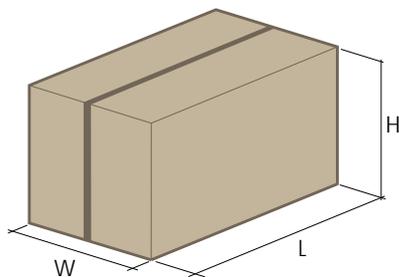


picnik box dimensions (mm)	L	W	H	qty (#)	volume (m <sup>3</sup> )	gross weight (kg)	net weight (kg)	packaging weight (kg)
picnik	1500	1000	780	1	1,170	73,7	60,0	13,7


MATERIALS



powder coated aluminium structured — **colour options:**

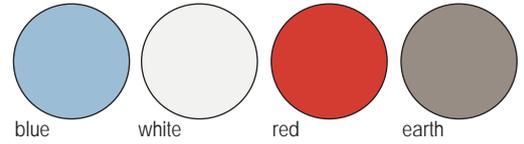

powder coated aluminium glossy



powder coated aluminium



materials	key facts	thickness	layer thickness	density	in/out-door	water	UV colour fastness	flame retarding
		mm	micron	10 <sup>3</sup> kg/m <sup>3</sup>				
 <p>Powder coated aluminium</p>	<ul style="list-style-type: none"> <li>- technique of applying dry paint to a part</li> <li>- electrostatically charged and sprayed onto the object</li> <li>- placed in an oven and powder particles melt and coalesce to form</li> </ul>	10	50 - 100	2,7	outdoor & indoor	n.a.	very good: colour can fade a little bit when exposed to UV	NEN-EN13501-1 A2-s1**
 <p>Anodized aluminium</p>	<ul style="list-style-type: none"> <li>- thickest layer of protection</li> <li>- no further treatment, does not alter its life span</li> <li>- very harmful</li> <li>- small electrode contact may be visible</li> </ul>	10	50 - 100	2,7	outdoor & indoor	n.a.	very good	NEN-EN13501-1 A1*
 <p>Painted aluminium - high gloss</p>	<ul style="list-style-type: none"> <li>- most commonly used painting technique, also used in car industry</li> <li>- multilayer finish, less scratch resistant than powder coated</li> <li>- recommended for indoor use</li> </ul>	10	50 - 100	2,7	indoor	n.a.	very good: colour can fade a little bit when exposed to UV	NEN-EN13501-1 A2-s1**

\* NEN-EN13501-1 A1: Class A1 products will not contribute in any stage of the fire including the fully developed fire. For that reason they are assumed to be capable of satisfying automatically all requirements of all lower classes.

\*\* NEN-EN13501-1 A2-s1: Satisfying the same criteria as class B for the SBI-test according to EN 13823. In addition, under conditions of a fully developed fire these products will not significantly contribute to the fire load and fire growth.



## APPLICATIONS

Indoors & outdoors (several versions).

Needed free space: 1,5 x 2 m

Private use: living, kitchen, on terraces, patios.


Public use: hotel and catering industry (indoors & outdoors), company terraces, public spaces, ...

Ex.: Tate Modern, library in Phoenix, ...

## INSTRUCTIONS

There are several indoor and outdoor versions available. The powder coated version (in sky blue, red, white, and earth colour) can be used both indoors and outdoors.

A high gloss version is available on request (only for indoor use).





## WARNINGS

Every guarantee shall be excluded as well for the matting of the paint when used in harsh conditions. This attribute will be carefully pointed out to the customer at delivery, namely the fact that the paint may become dull by regular contact with eg. color, salt, acids, ... ,who will in turn be responsible for informing the end consumer about this.


## USE

Table for 2 persons, creates a cozy atmosphere for an intimate conversation.

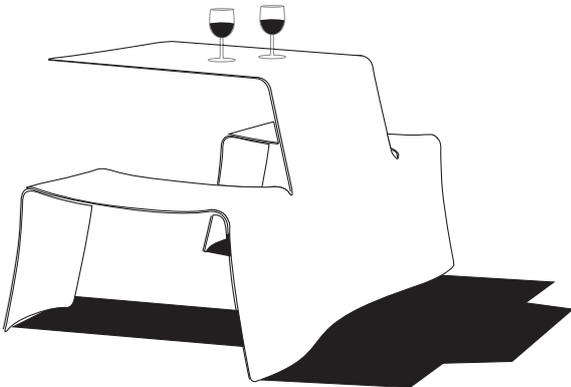


## ANCHORING

1. Remove the protection caps of the fastening screws of the 4 feet.
2. Remove the feet.
3. Replace them by the 4 new feet. The side of the holes should always be facing inwards.
4. Insert the fastening screws in the 4 ground anchor kit feet and fasten them.

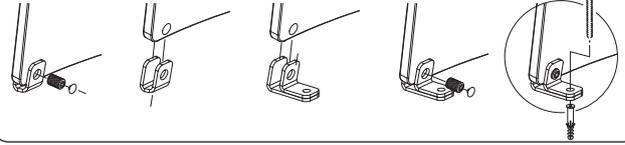

## GOOD TO KNOW

1. Picnik is cut out of one aluminium sheet without any loss of material.

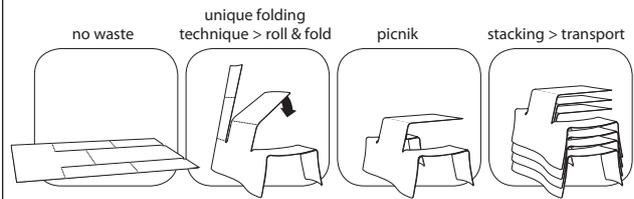

## F.A.Q.

*Q: Is it possible to stack the table?*

A: It is possible but as it is quite heavy, (it is not so often one).

*Q: Is it easy to move the table?*

A: With two people this is very easy.

## AWARDS



## HOW TO USE

Have a personal moment, face to face!

## MAINTENANCE

Check: [www.extremis.be/tools/picnik](http://www.extremis.be/tools/picnik)



