## **Product Information Sheet**


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources						
Supplier's nam	e or trade mark:	Menu A/S				
Supplier's addr	ess: PD, Aarhusga	ade 130, 2150 Nord	lhavn -, DK			
Model identifie	er: 4863539					
Type of light so	ource:					
Lighting techno	logy used:	LED	Non-directional or directional:	DLS		
Light source cap-type		PCB Board				
(or other electric interface)						
Mains or non-mains:		NMLS	Connected light source (CLS):	No		
Colour-tuneabl	e light source:	No	Envelope:	-		
High luminance	light source:	No				
Anti-glare shiel	d:	Yes	Dimmable:	Yes		
		Product para	meters			
Parameter		Value	Parameter	Value		
		General product	parameters:			
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		3	Energy efficiency class	G		
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		250 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700		
On-mode power (P <sub>on</sub> ), expressed in W		2,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the second decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81		
Outer dimensions	Height	6	Spectral power	See image		
	Width	50	distribution in the	in last page		
without	Depth	50		Page 1 /		

separate control gear, lighting control parts and non- lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity	0,450			
		coordinates (x and y)	0,400			
Parameters for directional light sources:						
Peak luminous intensity (cd)	240	Beam angle in degrees, or the range of beam angles that can be set	90			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	0	Survival factor	0,00			
the lumen maintenance factor	0,85					

(a)'-': not applicable; (b)'-': not applicable;

## Spectrum Test Report

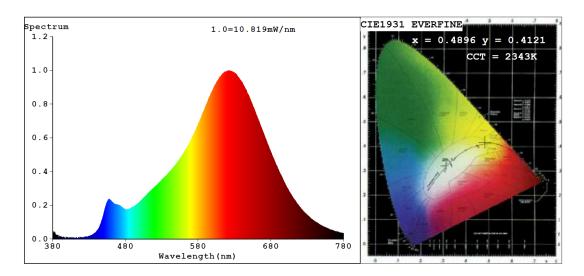

## Color Parameters:

Chromaticity Coordinate: x=0.4896 y=0.4121/u'=0.2812 v'=0.5324